## **Truck/Rail/Livestock Scales**

### **Table of Contents**

#### TRUCK/RAIL/LIVESTOCK SCALES

Truck/Rail/Livestock Scales	TS-2
RailBoss™ Full Draft and Double Draft	TS-3
RoughDeck <sup>®</sup> AX A <i>xle Scale</i>	TS-5
AX3040 Axle Scale	TS-6



### **SURVIVOR®**

Truck, Rail and Livestock Scales

For more information on Rice Lake's full line of SURVIVOR® truck, rail and livestock scales please visit our website at www.ricelake.com or call 800-472-6703 and ask to speak with a heavy capacity team member.



## Truck Scales: www.ricelake.com/truckscales

SURVIVOR® OTR

Heavy-duty, top access, low profile concrete or steel deck scales

SURVIVOR® ATV

Heavy or extreme duty, top access portable steel deck scales

SURVIVOR® SR

Heavy-duty, low profile, concrete or steel deck siderail scales

SURVIVOR® PT

Heavy-duty, pit-type, concrete or steel deck scales

SURVIVOR® X

Extreme-duty, off-road vehicle scales

SURVIVOR® ATV-M

Self-contained levertronic, steel deck scales

SURVIVOR® PT-M

Pit-type, levertronic, concrete deck scales

## Rail Scales: www.ricelake.com/railscales

SURVIVOR® RT

Pit-type, rail/truck combination scales

SURVIVOR® PL

Low profile, pitless scales

RailBoss Full or Double Draft Rail Scales

# Livestock Scales: www.ricelake.com/livestockscales

SURVIVOR® AG

Livestock/Agriculture utility scale

SURVIVOR® LV

Livestock ring scale

SURVIVOR® LS

Multiple animal livestock scale



#### Full Draft and Double Draft



\* Non Legal-For-Trade

### **SPECIFICATIONS**

LOAD CELLS:

40,000 lb

**FULL SCALE CAPACITY:** 

320,000 lb

AXLE CAPACITY:

80,000 lb

**WARRANTY:** 

Two-year limited warranty

#### RAILBOSS - STANDARD FEATURES

- 80,000 lb axle capacity
- 320,000 lb full scale capacity
- 40,000 lb rail section capacity
- 115RE or 132RE rail sections
- 5 ft 10 in rail sections, pre-drilled for joint bars

#### Full Draft Package Includes:

- (8) 5 ft 10 in rail sections
- 60 ft of connecting cable
- Pre-drilled joint bars with connection hardware
- (2) Rice Lake junction boxes with transient protection
- 60 ft of homerun cable

#### Double Draft Package Includes:

- (4) 5 ft 10 in rail sections
- 60 ft of connecting cable
- Pre-drilled joint bars with connection hardware
- (1) Rice Lake junction box with transient protection
- 60 ft of homerun cable

#### **Optional Features**

- Custom rail sizes are available
- \* 920i® indicator with RailBoss software for Full Draft or Double Draft applications

#### **CALIBRATION UNIT - STANDARD FEATURES**


- Battery powered IQ plus® 390 indicator
- Wooden case
- Attachment hardware for 115RE and 132RE rails




## **Truck/Rail/Livestock Scales**

#### 

NOTE: Railboss will not operate without the 920i® indicator and software

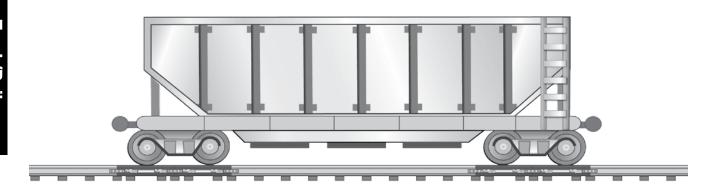

Full Draft

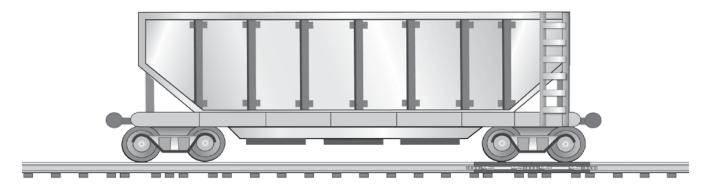

Double Draft

## RoughDeck® AX

**Axle Scale** 



#### STANDARD FEATURES

- System includes two platforms and four on/off ramps
- Axle capacity tandem platforms 60,000lb (two scales 30,000lb each)

#### Scale

- 32in W x 84in L x 6in H
- 30.000lb
- Contains four environmentally sealed, IP67 20,000 lb load cells per platform
- Treaded top plate with side access junction box
- JB4SS TuffSeal® Signal Trim junction box
- Top access foot adjustment holes
- Carbon steel captured ball feet
- 20ft Survivor EL147HE cable

- 32in W x 60in L x 6in H
- Treaded top plate

#### **SPECIFICATIONS**

**ESTIMATED SHIP WEIGHT:** 

Two scales and four ramps (3,600lb)

**END LOADING CAPACITY:** 


133% full scale at 30,000 lb

WARRANTY:

Five-year limited warranty

ECT CUID

PART #	CAPACITY	SIZE (W x L x H)	WEIGHT	PRICE
107637	60,000 lb (30,000 lb each)	32 in x 204 in x 6 in	3,600 lb	\$11,915.00

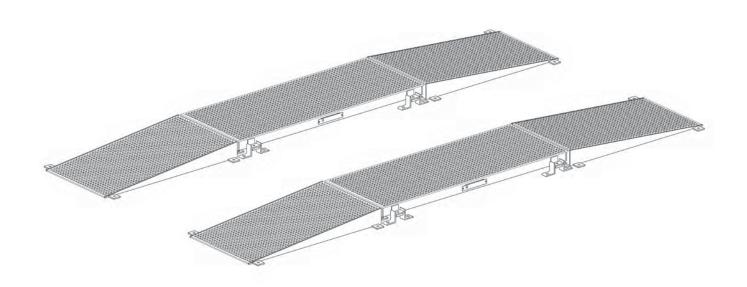



AX3040 Axle Scale



#### STANDARD FEATURES

- Sizes: 7ft, 12ft and 14ft lengths
- Construction: steel or aluminum
- Capacity: 60,000lb or 80,000lb
- JB4SS Tuff Seal Signal Trim Junction Box
- Treaded top plate with four lifting eyes
- 10ft EL146HE Interconnect cable with MS-type connectors to go between weigh pads
- 50ft EL147HE cable to connect weigh pad to indicator

#### Ramps

- 32 in W x 25.25 in L
- Steel or Aluminum

#### **SPECIFICATIONS**

**CONSTRUCTION:** 

Steel or Aluminum

ACCURACY:

3%

**END LOADING CAPACITY:** 

100% full scale at 30,000 lb 75% full scale at 40,000 lb **WARRANTY:** 

One-year limited warranty

PART #	CAPACITY	SIZE (W x L x H)	EST. SHIP WEIGHT	PRICE
	on - Painted Black	OILL (W X L X II)	WEIGHT	111102
112330 60	,000 lb (30,000 lb each)	2.5ft x 7ft x 5.63	1,817lb	\$9,660.00
11174880	,000 lb (40,000 lb each)	2.5ft x 12ft x 5.63	3,565 lb	11,635.00
11232880	,000 lb (40,000 lb each)	2.5ft x 14ft x 5.75	4,485 lb	15,800.00
Aluminum Const	ruction - Glass Beaded			
112329 60	,000 lb (30,000 lb each)	2.5ft x 7ft x 5.63	1,030 lb	11,250.00
	,			
OPTIONS/AC	CESSORIES			
111749 Ste	eel access ramps set of four	32 in W x 25.25 L x 5.63 H	750lb	1,100.00
	·	ır32 in W x 25.25 L x 5.63 H		

DI	MENSIONS		
7	FOOT STEEL		
Α	83.60in (2123.44mm)	Е	31.00in (787.4mm)
В	90.90in (2308.86mm)	F	32.00in (812.8mm)
С	141.25in (3587.75mm)	G	5.63in (143.0mm)
D	30.00in (762.00mm)		
12	FOOT STEEL		
Α	143.60in (3647.44mm)	Е	31.00in (787.4mm)
В	150.90in (3832.86mm)	F	32.00in (812.8mm)
С	201.2 in (5111.75mm)	G	5.63in (143.0mm)
D	30.00in (762.00mm)		
14 FOOT STEEL			
Α	167.60in (4257.04mm)	Е	31.00in (787.4mm)
В	174.90in (4442.46mm)	F	32.00in (812.8mm)
С	225.25in (5721.35mm)	G	5.75in (146.05mm)
D	30.00in (762.00mm)		
7	FOOT ALUMINUM		
Α	83.60in (2123.44mm)	E	31.00in (787.4mm)
В	90.90in (2308.86mm)	F	32.00in (812.8mm)
С	141.25in (3587.75mm)	G	5.63in (143.0mm)
D	30.00in (762.00mm)		

